




LED SOLAR FLOODLIGHT 60W, 100W, & 150W

DAYLIGHT
LIGHTING

PREMIUM LIGHTING FOR HOUSEHOLD, INDUSTRIAL AND COMMERCIAL APPLICATIONS

Diagram:

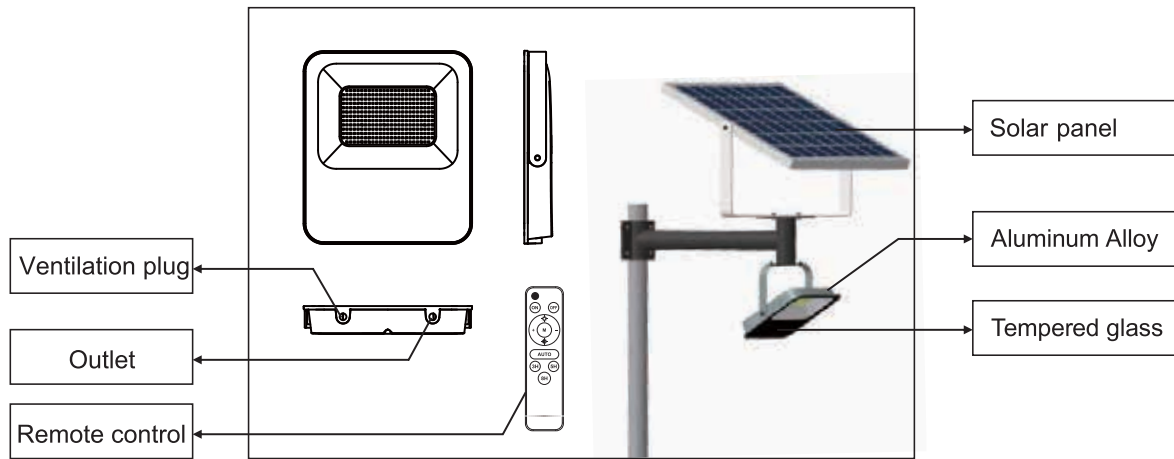

Specification:

	Power	60W	100W	150W
Lamp body	Lamp type	Sanan chips SMD 5050		
	Size	219.4x189.7x45mm	260x228x45.4mm	314.4x274.4x45.4mm
	Capacity	10000mAh	20000mAh	30000mAh
Battery	Material	LiFePO4 Battery		
	Size	32650x2	32650x4	32650x6
	Power	12W	15W	25W
Solar Panel	Material	Monocrystalline		
	Size	350x280x17mm	350x350x17mm	350x535x25mm
	Color temp	6000K		
CRI	≥80			
Protection level(conform)	IP65			
Work temp	-20°C +5 0°C			

60W,100W,150W

1. Charging time with solar irradiation is 5-8 hours, but there are many factors due to the processes of usage and region with customers.
2. Default factory settings(Automatic dimming): First 4 hours=100% light output, Next 3 hours=70% light output, 30% light output till sunrise.
3. Timing function: 3H,5H,8H
4. Another mode is brightness adjustment mode, which is indicated on remote control.
5. Best effect, recommended use of "AUTO" automatic mode.
6. Usually power on(installed) is defaulted to automatic mode.
7. Automatic mode: The brightness of the whole lamp can be adaptively controlled according to the battery's own

Important Safety Information


- Do not dispose of battery in fire. This may result in an explosion.
- Do not expose the light to fire or intense heat as the battery may explode.
- Do not immerse in water.
- Never look directly into the light or shine it into another person's eyes.
- Follow proper safety tips to prevent from falling off a ladder.
- Consult your local construction safety guide if needed for installing the light fixture on a building.

Fixing instructions


- The light fixture should be installed on a flat and stable surface.
- Avoid installing the light near an air conditioner, a central heater, or high voltage system.
- The solar charger board should be set in a sunny area where maximum sunlight can be collected. Typically, the solar board should face a direction (North) where sunlight can charge the board for at least 3 hours per day (5 hours per day if behind glass). It is suggested to charge the light for 24 hours before first use.
- Use a soft wet cloth to periodically (at least once a year) clean the charger board to avoid the reduction of power output due to accumulated dust.

Installation:


1-Fix the bracket of the solar panel on the mounting surface.




2-Remove the bracket from the solar panel.




3-Fix the lamp body to the bracket.




4-Adjust the angle which you need.



5-Connect the wire of the solar panel to the wire of the lamp.

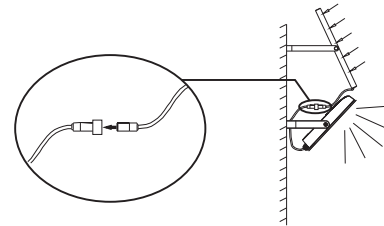

Remote control introduction

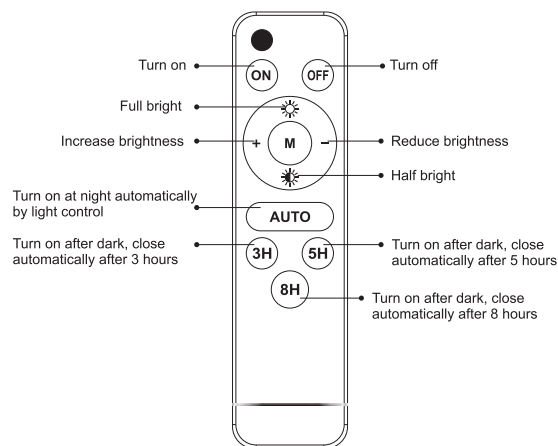


Quick Setup Procedure

⚠ Warning!

1. Please keep it away from the children.
2. This product can be installed for outdoor, but we suggest that against for the rain/storm & High lights.

Note : Please bring the following tools



This product should be disposed of responsibly at the end of its life. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice (Waste Electrical and Electronic Equipment Directive)

DAYLIGHT

LIGHTING

PREMIUM LIGHTING FOR HOUSEHOLD,
INDUSTRIAL & COMMERCIAL APPLICATIONS

Daylight Lighting (Pty) Ltd
Distribution throughout South Africa and Africa

Offices in: Port Elizabeth (Head Office), Cape Town, Johannesburg, Durban and Bloemfontein
Tel: +27 (0) 41 484 3330 | Web: www.daylightlighting.co.za | Email: sales@daylightlighting.co.za