



LED 2835 SMD

12v - 8mm PCB

FEATURES:

- 99.99% golden wire and copper support, super bright leds, stable and reliable
- Double PCB, reduces voltage drop
- LED's with one BIN system (3 Macadam), consistent color, no colour shift
- Ra>80
- IP grade: IP20 and IP65
- cUL/CE/ROHS certification
- 3m adhesive tape
- Dimmable
- 8mm PCB width

APPLICATIONS:

- Commercial , Residential
- Widely used in hotels, shopping malls, restaurants, bars, furniture cabinets, shelves, decorative lighting, direct lighting or indirect lighting



DAYLIGHT
LIGHTING

PREMIUM LIGHTING FOR HOUSEHOLD, INDUSTRIAL AND COMMERCIAL APPLICATIONS

Product Code	Description	IP	Kelvin/ Colour	Voltage	Lumen Output	CRI	Dimmable
DLTL01	LED STRIP 60 LED/M 12v 5.8w/M	20	3000k Warm white	12v	588 LM / m	>82	YES
DLTL02	LED STRIP 60 LED/M 12v 5.8w/M	20	4000k Cool/neutral White	12v	600 LM / m	>82	YES
DLTL03	LED STRIP 60 LED/M 12v 5.8w/M	20	6000k Daylight	12v	605 LM / m	>82	YES
DLTL04	LED STRIP 60 LED/M 12v 5.8w/M	65	3000k Warm white	12v	588 LM / m	>82	YES
DLTL05	LED STRIP 60 LED/M 12v 5.8w/M	65	4000k Cool/neutral White	12v	600 LM / m	>82	YES
DLTL06	LED STRIP 60 LED/M 12v 5.8w/M	65	6000k Daylight	12v	605 LM / m	>82	YES
DLTL16	LED STRIP 120 LED/M 12v 10w/M	20	3000k Warm white	12v	1040 LM / m	>82	YES
DLTL17	LED STRIP 120 LED/M 12v 10w/M	20	4000k Cool/neutral White	12v	1050 LM / m	>82	YES
DLTL18	LED STRIP 120 LED/M 12v 10w/M	20	6000k Daylight	12v	1070 LM / m	>82	YES
DLTL07	LED STRIP 60 LED/M 12v 5.8w/M	65	Blue	12v			YES
DLTL08	LED STRIP 60 LED/M 12v 5.8w/M	65	Green	12v			YES
DLTL09	LED STRIP 60 LED/M 12v 5.8w/M	65	Red	12v			YES


Connectors for 2835 SMD LED 12v - 8mm PCB

Product Code	Description	IP	Dimensions	Voltage
DLTLC01	LED strip connector, one end with 15cm wire	20	L15.3* W12.5 * H4.6mm	12v
DLTLC02	LED strip connector, end to end no wire	20	L15.3* W12.5 * H4.6mm	12v
DLTLC03	LED strip connector, end to end with 15cm wire	20	L15.3* W12.5 * H4.6mm	12v
DLTLC04	LED strip connector, one end with 15cm wire	65	L15.3* W13.4 * H8.1mm	12v
DLTLC05	LED strip connector, end to end no wire	65	L15.3* W13.4 * H8.1mm	12v
DLTLC06	LED strip connector, end to end with wire	65	L15.3 * W13.4* H8.1mm	12v




DIMENSIONS:


60 LED / M

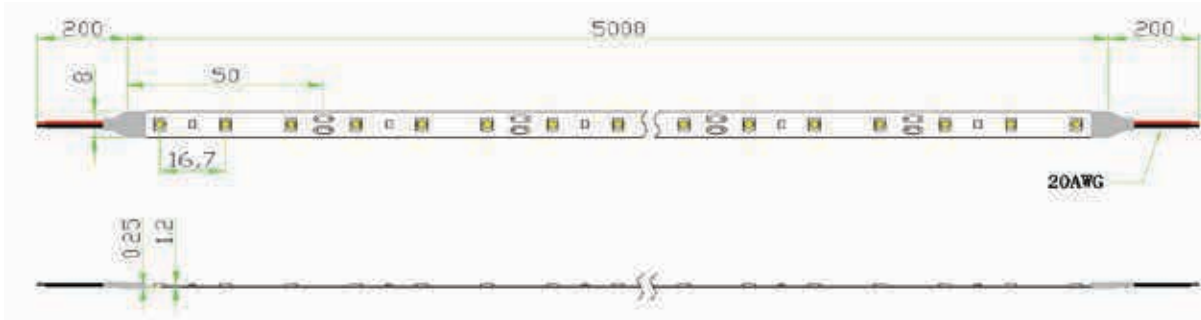

120 LED / M

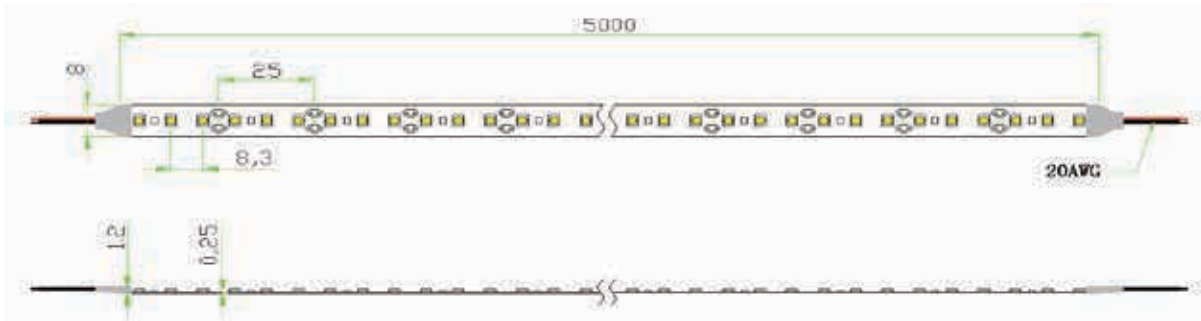

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

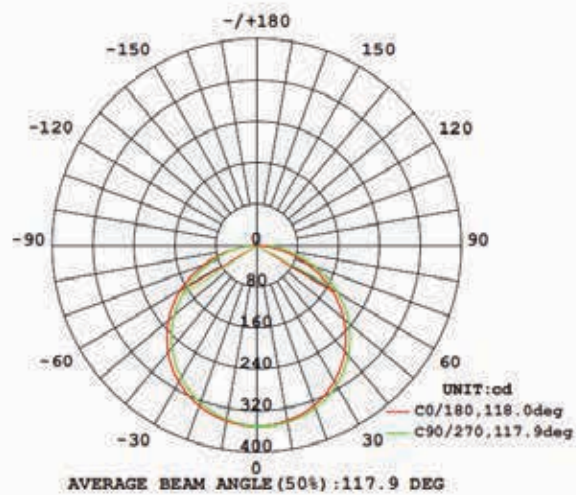

DAYLIGHT

LIGHTING

PREMIUM LIGHTING FOR HOUSEHOLD,
INDUSTRIAL & COMMERCIAL APPLICATIONS

Daylight Lighting (Pty) Ltd
Distribution throughout South Africa and Africa

Offices in: Port Elizabeth (Head Office), Cape Town, Johannesburg, Durban and Bloemfontein
Tel: +27 (0) 41 484 3330 | Web: www.daylightlighting.co.za | Email: sales@daylightlighting.co.za